

### DESCRIPTION

The GBLCxxCI Series are ultra low capacitance transient voltage suppressor arrays, designed to protect applications such as portable electronics and SMART phones. This series is available in both unidirectional and bidirectional configurations and is rated at 350 Watts for an 8/20 $\mu$ s waveshape.


The GBLCxxCI and Series meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This series offers a ultra low capacitance and low leakage current in a miniature SOD-323 package.

### FEATURES

- IEC61000-4-2 (ESD)  $\pm 15$ kV (air),  $\pm 8$ kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (Lightning) 12A (8/20 $\mu$ s)
- Protects one I/O line (bidirectional)
- Low clamping voltage
- Working voltages : 3V, 5V, 8V, 12V, 15V, 24V
- Low leakage current
- Response Time is < 1 ns

### ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
$V_{ESD}$	ESD per IEC 61000-4-2 (Air)	$\pm 15$	kV
	ESD per IEC 61000-4-2 (Contact)	$\pm 8$	
$P_{PP}$	Peak Pulse Power (8/20 $\mu$ s)	350	W
$T_{OPT}$	Operating Temperature	-55/+150	$^{\circ}$ C
$T_{STG}$	Storage Temperature	-55/+150	$^{\circ}$ C
$T_L$	Lead Soldering Temperature	260	$^{\circ}$ C

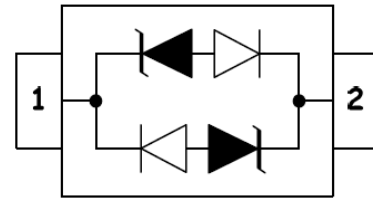

### MACHANICAL DATA

- SOD-323 package
- Flammability Rating: UL 94V-0
- Packaging: Tape and Reel
- High temperature soldering guaranteed:260 $^{\circ}$ C/10s
- MSL1


### APPLICATIONS

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Peripherals
- USB Interface


**ELECTRICAL CHARACTERISTICS (Tamb=25 C)**

PART NUMBER	DEVICE MARKING	V <sub>RWM</sub> (V) Max	V <sub>B</sub> @1mA (V) Min	V <sub>C</sub> @1A (V) Max	V <sub>C</sub> @I <sub>pp</sub> (V)		V <sub>C</sub> @I <sub>pp</sub> (V)		I <sub>R</sub> (μA) Max	C <sub>T</sub> (pF) Typ.
					Max	I <sub>pp</sub> (A)	Max	I <sub>pp</sub> (A)		
GBLCC03CI	CC	3.0	4.0	7.0	13.9	8	20.0	20	5	0.8
GBLCC05CI	AC	5.0	6.0	9.8	18.3	8	20.0	18	1	0.8
GBLCC08CI	BC	8.0	8.5	13.4	18.5	8	24.0	18	1	0.8
GBLCC12CI	DC	12.0	13.3	19.0	24.0	6	28.6	12	1	0.8
GBLCC15CI	EC	15.0	16.7	24.0	29.0	5	31.8	10	1	0.8
GBLCC24CI	HC	24.0	26.7	43.0	45.0	3	56.0	6	1	0.8


**Marking**




**ELECTRICAL CHARACTERISTICS CURVE**

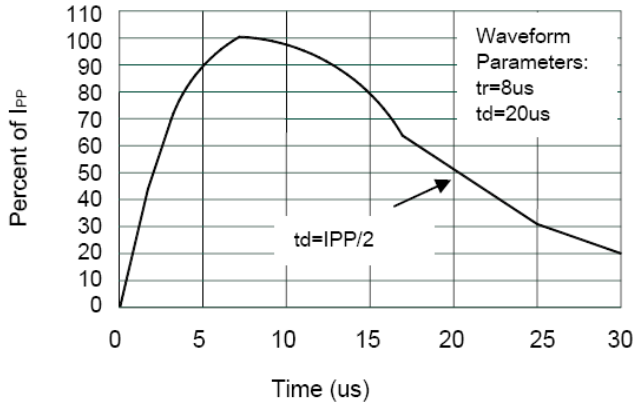


**Pulse Waveform**

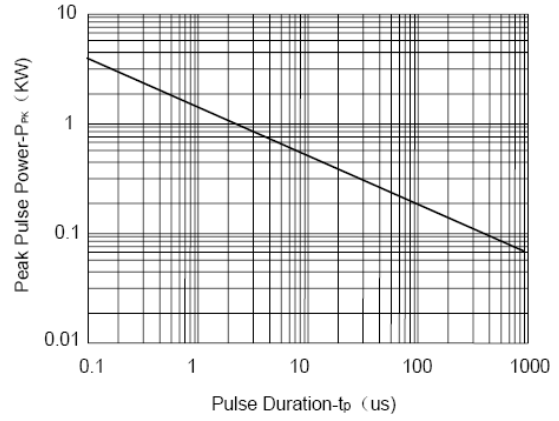

**Non-Repetitive Peak Pulse Power vs. Pulse Time**

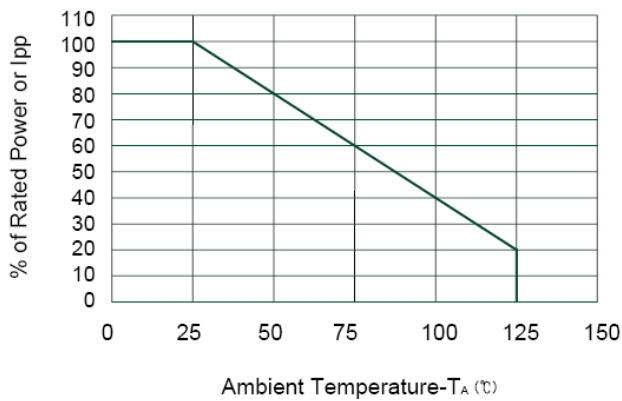


**Power Derating Curve**

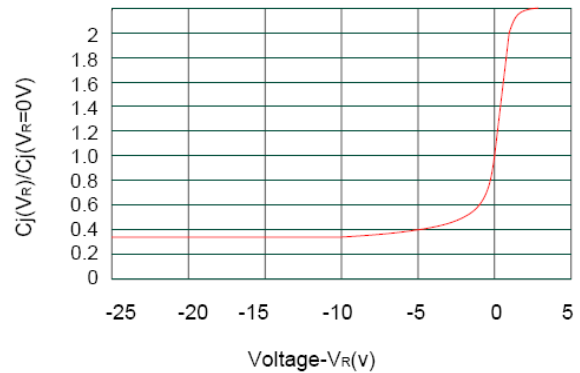


**Junction Capacitance vs. Reverse Voltage**

SOD-323 PACKAGE OUTLINE DIMENSIONS

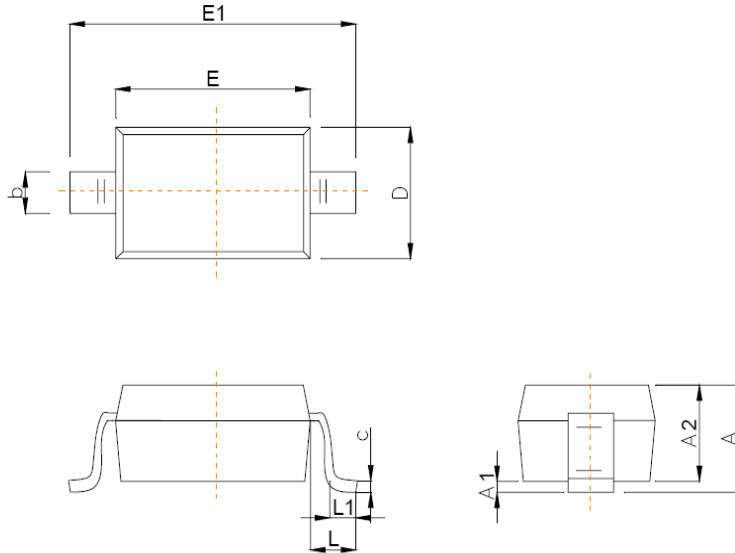

Symbol	Dimensions In Millimeters	
	Min	Max
A		1.00
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
e	1.800	2.040
L	0.475 REF	
L1	0.250	0.400
θ	0°	8°

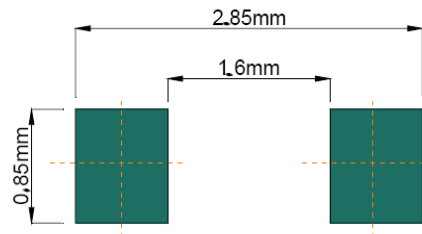

Recommended Pad outline

Ordering information

Order code	Package	Baseqty	Deliverymode
UMW GBLC03CI-LF-T7	SOD-323	3000	Tape and reel
UMW GBLC05CI-LF-T7	SOD-323	3000	Tape and reel
UMW GBLC08CI-LF-T7	SOD-323	3000	Tape and reel
UMW GBLC12CI-LF-T7	SOD-323	3000	Tape and reel
UMW GBLC15CI-LF-T7	SOD-323	3000	Tape and reel
UMW GBLC24CI-LF-T7	SOD-323	3000	Tape and reel