
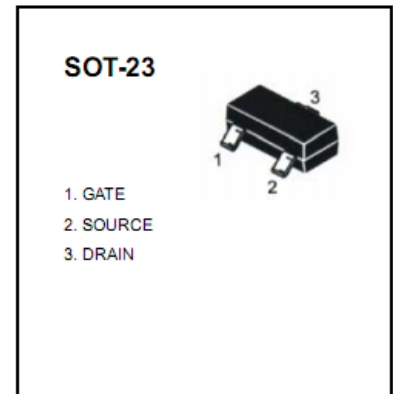


SOT-23 Plastic-Encapsulate Transistors

SK 2301 MOSFET(P-Channel)

FEATURES

PWM applications
Load switch
Power management



MAXIMUM RATINGS (TA=25°C unless otherwise noted)


Symbol	Parameter	Value	Units
V _{DS}	Drain-Source voltage	-20	V
V _{GS}	Gate-Source voltage	±12	V
I _D	Drain current	-2.5	A
P _D	Power Dissipation	0.9	W
T _j	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55-150	°C

ELECTRICAL CHARACTERISTICS (T_{amb}=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =-250uA	-20			V
Gate-Threshold Voltage	V _{th(GS)}	V _{DS} = V _{GS} , I _D =-250 uA	-0.4	-0.7	-1	V
Gate-body Leakage	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V			-1	uA
Drain-Source On-Resistance	r _{DS(ON)}	V _{GS} =-4.5V, I _D =-2.5A		120	160	mΩ
		V _{GS} =-2.5V, I _D =-2A		175	250	mΩ
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =-10V, V _{GS} =0V, f=1MHz		290		pF
Output Capacitance	C _{oss}			55		
Reverse Transfer Capacitance	C _{rss}			29		
Switching Capacitance						
Turn-on Delay Time	t _{d(on)}	V _{DD} =-10V, I _D =-1A, V _{GS} =-4.5V R _{GEN} =6Ω		8		nS
Turn-on Rise Time	t _r			13		nS
Turn-off Delay Time	t _{d(off)}			13		nS
Turn-off Fall Time	t _f			18		nS
Total Gate Charge	Q _g	V _{DS} =-10V, I _D =-2.5A, V _{GS} =-4.5V,		3		nC
Gate-Source Charge	Q _{gs}			0.7		nC
Gate-Drain Charge	Q _{gd}			0.8		nC
Drain-Source Diode Characteristics						
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _D =-2.5A			-1.2	V
Diode Forward Current	I _S				-2.5	A

Typical Characteristics

Switch Time Test Circuit and Switching Waveforms:

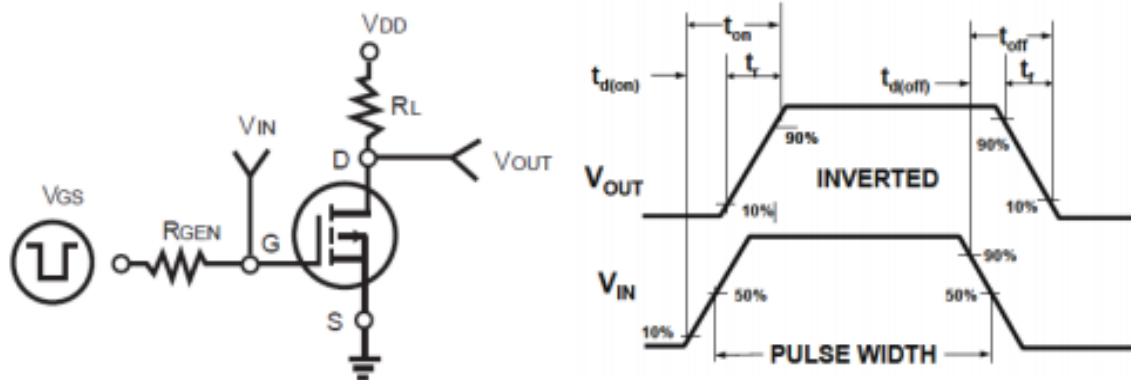

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS (Curves)

Figure1. Power Dissipation

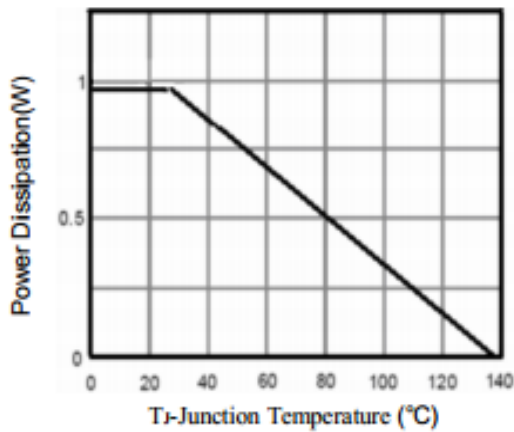


Figure2. Drain Current

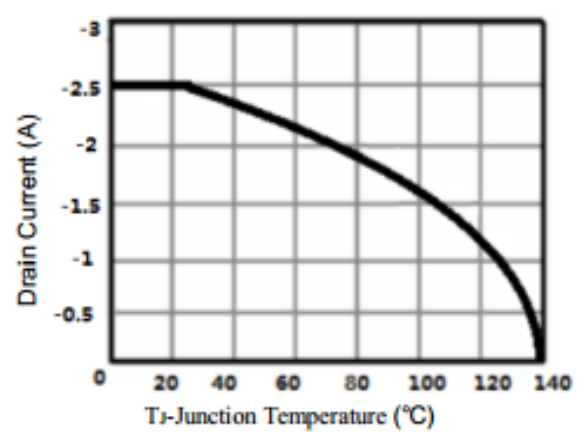


Figure3. Output Characteristics

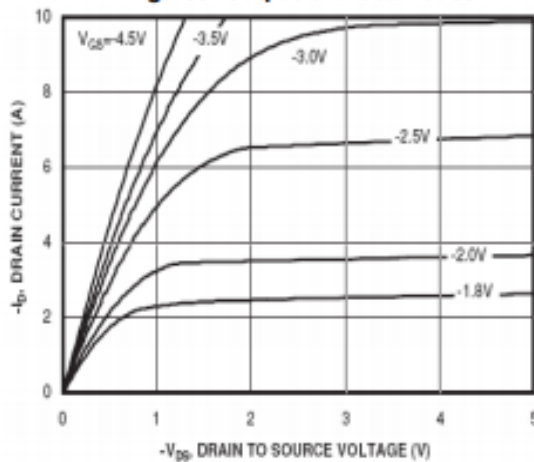


Figure4. Transfer Characteristics

